

VideoEase CCTV Balun 500000, 500009

Overview

The VideoEase CCTV Balun allows a single CCTV video signal to be transmitted via cost-effective unshielded twisted pair (UTP) cable.

Used in pairs, the CCTV Balun eliminates costly and bulky coaxial cable, allowing CCTV security and surveillance equipment to be connected using standard structured cabling techniques for neater and more streamlined cabling.

The CCTV Balun is available in two models; CCTV Screw Terminal Balun (500009) and CCTV Modular Balun (500000). Both models may be used interchangeably.

Benefits

Cost savings - eliminate costly coaxial cable
Quicker moves, adds and changes
Neater wiring



Features

Eliminates coax cable
Up to 2,200 feet (670m) via Cat 5 UTP*
Strain relief (500009)
Compact design
Low return loss
Lifetime warranty
** less distance may result with DVR equipment. Typical: 1,000 to 1,500 ft via Cat5*

Specifications	
Environment	Close-Circuit TV (CCTV) equipment for security and surveillance.
Devices	CCTV cameras, monitors, switchers, sequencers, multiplexers, digital video recorders (DVR), IP camera servers and other CCTV equipment.
Transmission	Transparent to the user.
Bandwidth	Video: DC to 8 MHz.
Maximum Input	1.1Vp-p
Insertion Loss	Less than 2 dB per pair over the frequency range from DC to 8 MHz
Return Loss	Greater than 15 dB over the frequency range from DC to 8 MHz
Common Mode Rejection	Greater than 40 dB @ 8 MHz
Max. Distance Colour	Cat 3 –1200 ft; Cat 5 – 2200 ft.* <i>* less distance may result with DVR equipment. Typical: 1,000 to 1,500 ft via Cat5</i>
Max. Distance Black & White	Cat 3 –1500 ft; Cat 5 – 2500 ft
Cable – UTP	24 gauge or lower solid copper twisted pair wire impedance: 100 ohms at 1 MHz Maximum capacitance: 20 pf/foot. Attenuation: 6.6 dB/1000 ft at 1 MHz
Cable – BNC	Impedance: 75 ohms at 1 MHz (RG59/U).
Connectors <i>Reverse polarity sensitive</i>	500000: RJ45 Pins R7 T8 500000R: RJ45 Pins R8 T7 (pin compatible with 500022, 500024, 500130, 500131) 500009: Two (2) screw terminals
Impedance	Input: 75 ohms (BNC) Output: 100 ohms (RJ45)
Temperature	Operating: 0° to 55° C. Storage: -20° to 85° C. Humidity: up to 95%
Enclosure	ABS fire retardant plastic
Dimensions	500000: 1.75" x .75" x 1.00" (4.44cm x 1.9cm x 2.54cm) 500009: 2.30" x 0.62" x 0.62" (5.8cm x 1.57cm x 1.57cm)
Weight	1.5 oz (42.5gm)
Regulatory	FCC Class A, CE, RoHS
Warranty	Lifetime
Order Information	500000 CCTV Modular Balun, R7T8 500000R CCTV Modular Balun, R8T7 500009 CCTV Screw Terminal Balun


© MuxLab Inc. 2002-2007

VideoEase CCTV Balun

Head Office

8114 Trans Canada Hwy, St. Laurent, Quebec,
H4S 1M5
Internet: www.muxlab.com
E-mail: videoease@muxlab.com

**VideoEase CCTV Balun
50000, 50009**

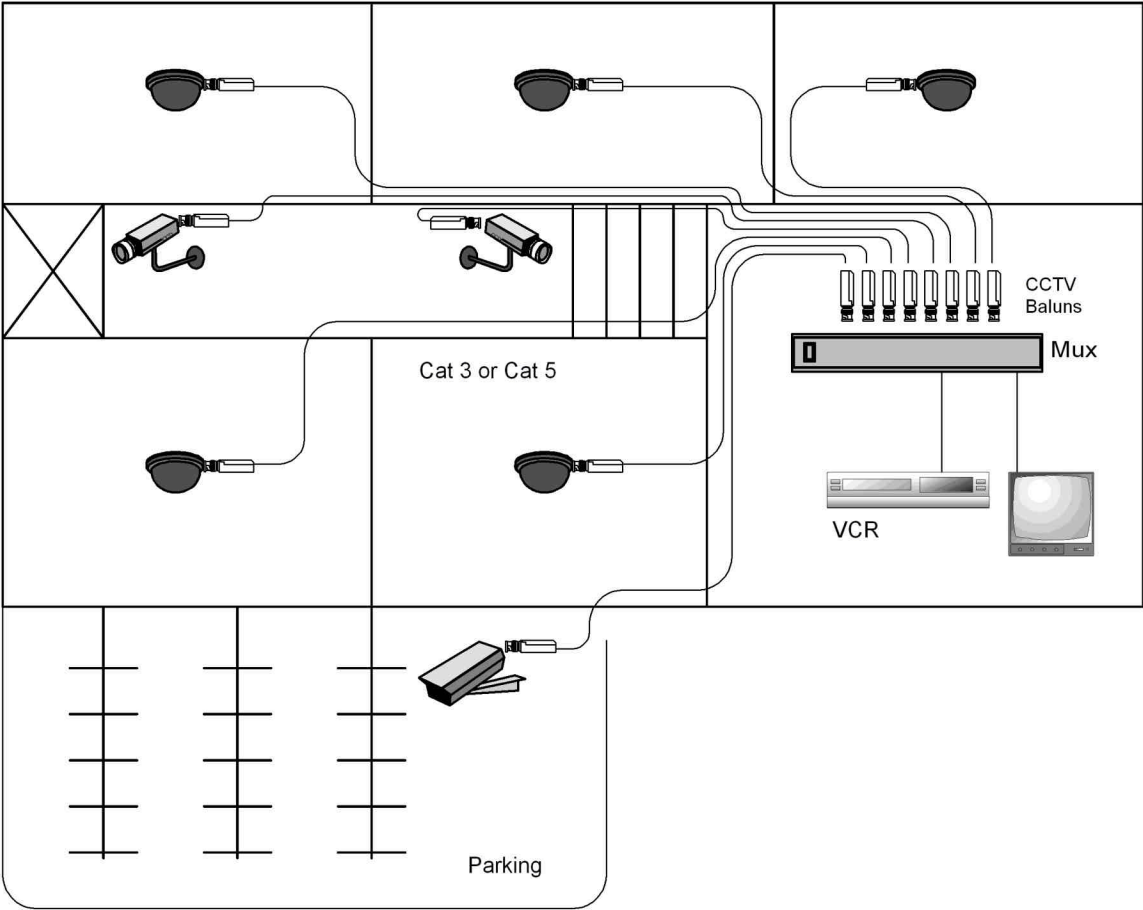

BAEKDOO INTERSYSTEMS CO., LTD.
TEL 02-579-9126
FAX 02-579-9129
<http://www.baek-doo.com>