

1 →

Video

2 →

Audio

Data

SDI Video and Digital Audio Transmission

The OTS-1SD2DA provides for the digital transmission of 1 Channel of uncompressed SDI Video and 2 Channels of AES/EBU Audio, at absolute broadcast quality.

System Design


All units come in an insert card version. The cards can be inserted into our 16-slot, 19" rack-mountable card cage (CC-16-100) or one of our smaller Optiva™ Desktop Card Racks (DTCR Series).

The Desktop Card Racks can handle one, two or four insert cards, creating compact, mountable, stand alone systems. The use of separate DTCR enclosures allows for future flexibility and expansion as all cards are hot-swappable and can be used in any enclosure. Each one of our card housing units operate with an appropriate power supply. See "Accessories" for power supply specifications.

Optiva™ Upgrade Path


This system can be purchased without an optical port as an add-on to an existing Optiva™ system daisy-chain. (See "Non-Optical Version" below).

The Optiva™ bandwidth requirement of this system is 318 Mbps.

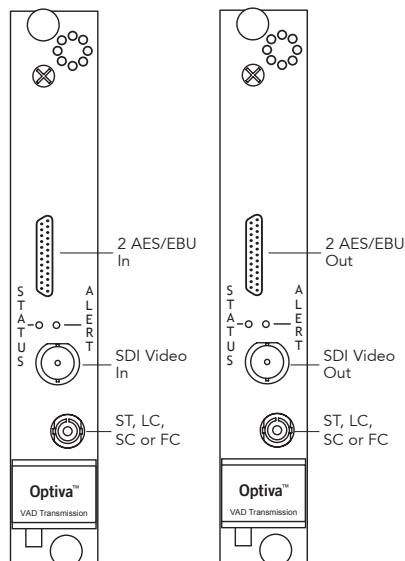

OTS-1SD2DAT

OTS-1SD2DAR



Each insert card comes with a label identifying the specific protocols handled, connector pin-out and other vital information.

For optimal bandwidth allocation, each insert card can daisy-chain with an additional card in the same chassis. See "Optiva™ Upgrade Path".

Features

- Uncompressed SDI Video and 2 AES/EBU channels over one fiber
- TDM - Single Wavelength
- True DC restoration
- Flat frequency response
- Complies with SMPTE standards for Video and Audio transmission
- Compatible with MDM-7000 Series for WDM and CWDM multiplexing
- No EMI or RFI and no ground loops
- Stand alone or rack-mount
- Ideal for Broadcast/Studio and Professional AV applications

Versions Available*

Wavelength (nm) & Fiber	Transmit**	Receive**	Optical Connector	Optical Budget (dB)	Range*** (km)	Form Factor
1310 Multimode	OTS-1SDT2DAT-A1-XX-IC	OTS-1SD2RDAR-A1-XX-IC	ST, FC, LC or SC	10	3	IC (1-slot)
1310 Singlemode	OTS-1SDT2DAT-A2-XX-IC	OTS-1SD2RDAR-A2-XX-IC	ST, FC, LC or SC	7	10	IC (1-slot)
1310 Singlemode (D)	OTS-1SDT2DAT-A2D-XX-IC	OTS-1SD2RDAR-A2D-XX-IC	ST, FC, LC or SC	14	20	IC (3-slots)
1550 Singlemode	OTS-1SDT2DAT-A3-XX-IC	OTS-1SD2RDAR-A3-XX-IC	ST, FC, LC or SC	17	40	IC (1-slot)
1550 Singlemode (D)	OTS-1SDT2DAT-A3D-XX-IC	OTS-1SD2RDAR-A3D-XX-IC	ST, FC, LC or SC	25	60	IC (3-slots)
1270-1610 SM (CWDM)	OTS-1SDT2DAT-L4-XX-IC	OTS-1SD2DAR-L4-XX-IC	ST, FC, LC or SC	Varies	20-70	IC (1-slot)
Non-Optical Version	OTS-1SD2DAT-NOC-IC	OTS-1SD2DAR-NOC-IC	N/A	N/A	N/A	IC (1-slot)

* Contact Opticomm for other versions available.

** XX indicates the type of optical connector. Each of ST, FC, LC or SC are available.

*** Chromatic dispersion and additional losses should be taken into account.

NOTE: The systems in this category offer transmission of certain signals in set configurations. If your application involves multi-signal transmission and/or would benefit from system upgradeability, please visit the Optiva™ Platform section on page 14. To configure an Optiva™ system to your precise needs, please register for the 'Product Configurator' at www.opticomm.com

SDI & HD-SDI

Video

Standard	SMPTE 259M
Pathological Test Code	RP-178
Bit Rate	270 Mbps (Nominal); 143/177/360 Mbps (Optional)
Bit error rate	10 ⁻¹⁴
Connector	BNC (IEC 60169-8)

Audio

Digital Format	AES/EBU AES3-1992 (ANSI S4,40) SMPTE 276M
Connector	Micro DB25

General

Dimensions & Weight	Insert Card (IC): 6.3" L x 0.8" W x 4.0" H	11 oz
Operating temperature	-20° C to +55° C	
Storage temperature	-40° C to +85° C	
Humidity	0 to 95% non-condensing	
Operating voltage	9-12 V _{DC}	
Consumption	1A Max per Insert Card	
System Latency	Less than 1ms	

Local Monitoring	LED Status Indication
-------------------------	-----------------------

Remote Monitoring	Compatible with OptivaView™ SNMP Management Suite
--------------------------	--

Optiva™ Configurable Communication Platform
Network Management
SDI & HD-SDI
Composite Video, Audio & Data
RGB/VGA/DVI
Audio/FSK/Intercom
Data (Ethernet/Serial/USB)
CATV/RF & L-Band
Optical Switching, Routing & Redundancy
Passive Multiplexing Solutions
Enclosures, Racks & Frames
Power Supplies & Accessories

10 **ISO**
YEAR **9001:2000**
WARRANTY **CERTIFIED**



FCC **PART 15**
COMPLIANT

Emissions: FCC Part 15, ICES-003,
AS/NZS, 3548, EN55022
Immunity: ENVS0204,
EN61000-4-2,3,4,5,6,11
Safety: UL1950, CAN/CSA 22.2,
NO.950-95

MADE IN THE USA

Sample Configuration

